

BLOWER UNIT

COMPONENTS

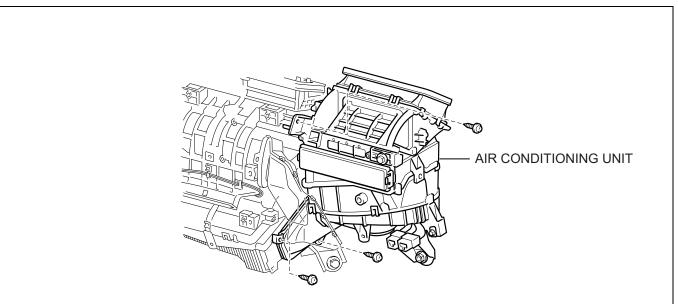

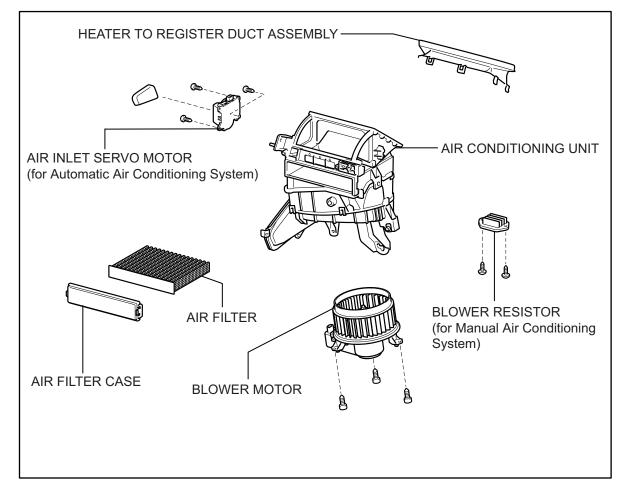

AC

u u

E127175E03


REMOVAL

1. DISCONNECT CABLE FROM NEGATIVE BATTERY TERMINAL

CAUTION:

Wait at least 90 seconds after disconnecting the cable from the negative (-) battery terminal to prevent airbag and seat belt pretensioner activation.


- 2. REMOVE UPPER INSTRUMENT PANEL
 - (a) Remove the upper instrument panel (see page IP-4).
- 3. REMOVE LOWER INSTRUMENT PANEL
 - (a) Remove the lower instrument panel (see page IP-16).
- 4. REMOVE AIR DUCT (See page AC-188)
- 5. REMOVE AIR CONDITIONING UNIT
 - (a) Remove the air conditioning unit (see page AC-185).
- 6. REMOVE BLOWER ASSEMBLY
 - (a) Remove the 3 screws and blower.




DISASSEMBLY



(a) Detach the 7 claws and register duct.







2. REMOVE AIR FILTER CASE

- (a) Detach the 2 claws and remove the air filter case.
- (b) Remove the air filter.







- 3. REMOVE AIR INLET CONTROL SERVO MOTOR (for Manual Air Conditioning System)
 - (a) Remove the 3 screws and air inlet servo motor.




- 4. REMOVE AIR INLET CONTROL SERVO MOTOR (for Automatic Air Conditioning System)
 - (a) Detach the claws and lever.




(b) Remove the 3 screws and air inlet servo motor.



- REMOVE BLOWER RESISTOR (for Manual Air Conditioning System)
 - (a) Remove the 2 screws and blower resistor.




- 6. REMOVE BLOWER MOTOR
 - (a) Remove the 3 screws and blower motor.




REASSEMBLY


- 1. INSTALL BLOWER MOTOR
 - (a) Install the blower motor with the 3 screws.




- INSTALL BLOWER RESISTOR (for Manual Air Conditioning System)
 - (a) Install the blower resistor with the 2 screws.



- 3. INSTALL AIR INLET CONTROL SERVO MOTOR (for Automatic Air Conditioning System)
 - (a) Install the air inlet servo motor with the 3 screws.




(b) Attach the claw to install the lever.




- 4. INSTALL AIR INLET CONTROL SERVO MOTOR (for Manual Air Conditioning System)
 - (a) Install the air inlet servo motor with the 3 screws.






5. INSTALL AIR FILTER CASE

- (a) Install the air filter.
- (b) Attach the 2 claws to install the air filter case.



6. INSTALL HEATER TO REGISTER DUCT ASSEMBLY

(a) Attach the 7 claws to install the register duct.



INSTALLATION

- 1. INSTALL BLOWER ASSEMBLY
 - (a) Install the blower assembly with the 3 screws.
- 2. INSTALL AIR CONDITIONING UNIT
 - (a) Install the air conditioning unit (see page AC-197).
- 3. INSTALL AIR DUCT (See page AC-199)
- 4. INSTALL LOWER INSTRUMENT PANEL
 - (a) Install the lower instrument panel (see page IP-23).
- 5. INSTALL UPPER INSTRUMENT PANEL
 - (a) Install the upper instrument panel (see page IP-9).
- 6. CONNECT CABLE TO NEGATIVE BATTERY TERMINAL
- 7. CHECK SRS WARNING LIGHT
 - (a) Check the SRS warning light (see page RS-37).

AC